

BARBER WILSONS & COLTD ONCE ALC LOCAL COLTD





IMPORTANT NOTE REGARDING INSTALLATION

It is essential that thermostatic valves are installed giving full access for servicing. Where a suitable face plate is provided for finishing it should be affixed to the wall with a thin bead of silicone sealant. Under no circumstances should valves be plastered in, tiled in or otherwise entombed. If practical, rear access should be provided. Failure to follow these instructions could nullify any warranty, and could result in damage to tiled or decorative finishes. It is **essential** that pipe lines are flushed **before** fitting.




PS53C Recessed thermostatic shower mixer on 229mm (9") round wall plate.











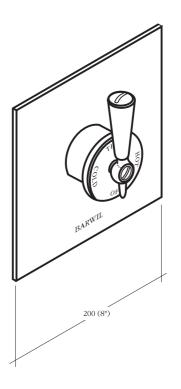

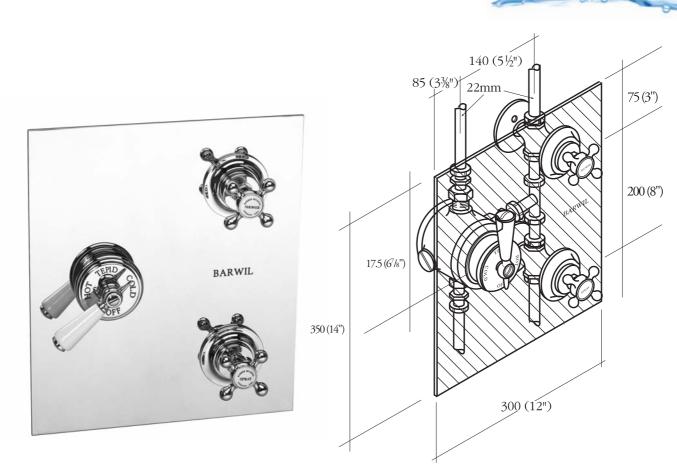


PS53C2 & PS53C2-CD (Ceramic Disc)
Recessed thermostatic shower mixer on square plate with separate flow valves for shower, spray & bath.

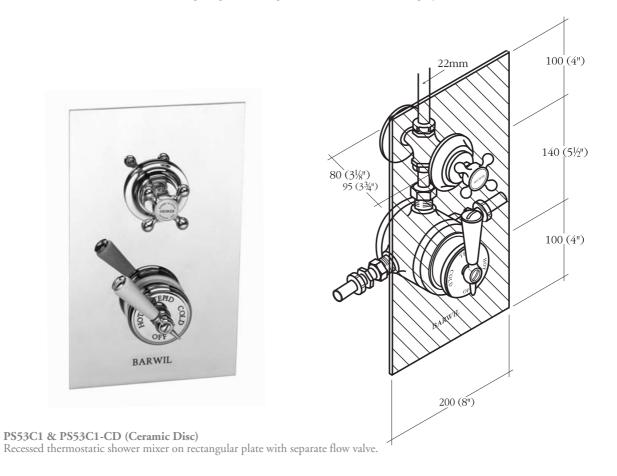







Comprises standard 17½" shower arm, back inlet and 5" rose. Please consult current price list for variations.

PERFORMANCE OF THERMOSTATIC VALVES

Flow Rates at Equal Pressure Drops. (Open outlet only. Does not allow for losses through pipes & fittings).

Pressure drop (bar) 0.1	0.5	1.0	1.5	2.0	3.0	4.0	5.0	
Flow rate (litres/min)	14	30	48	55	61	76	90	102

Thermostatic valves to match Barwil tap styles





Regent (R)

Barber Wilsons thermostatic valves match the following Barwil styles:

- The 1890s (GA) range have the original exposed top works.
- The Regent (R) range with 'easy-clean' shrouded head parts.



Barber Wilsons & Co Ltd Crawley Road, Wood Green, London N22 6AH

Tel: +44 (0)208 888 3461 Fax: +44 (0)208 888 2041

Email: sales@barwil.co.uk





