
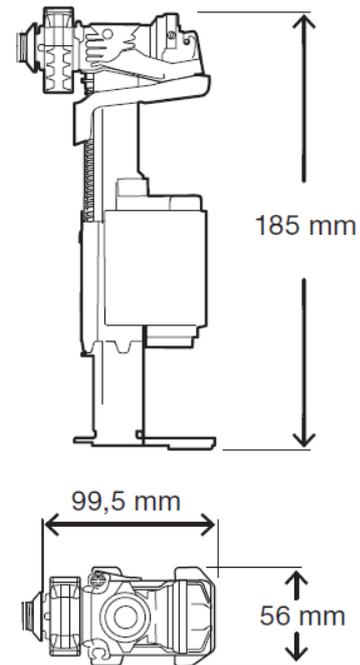


# Technical Sheet

Azor Plus

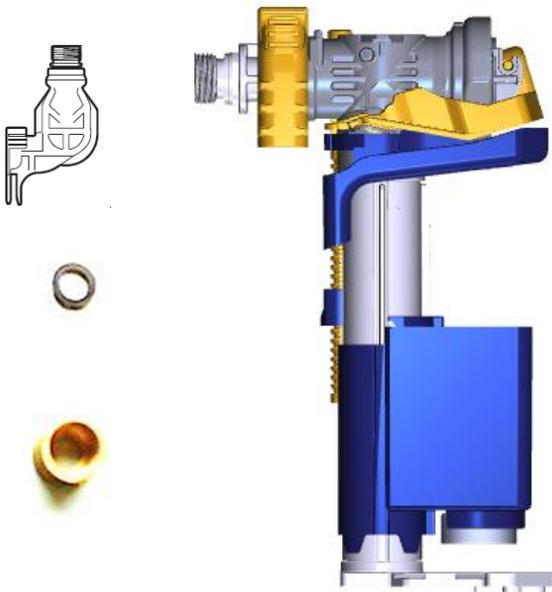

(measurements in mm)

## Product identification

**Code 564101IS** AZOR PLUS 3/8 float valve, lateral and top connection, adaptor 3/8"-1/2".

## Definition and application

- Inlet valve combined with OLI74,EVO,OLI120,EXPERT EVO,QUADRA  
In-wall cisterns currently in Production.
- Inlet valve combined with DIAMANTE,BETTER,GIADA,EXPERT,HAPPY,PERLA  
In-wall Cisterns currently out of Production.

## Technical features

- Lateral or top installation
- Universal, compact and reversible
- Delayed opening to avoid the flush cistern loading as long as the outlet valve is still opened (0,5 liters water saving per every flush)
- Lower limiter with key function for maintenance.
- Easy maintenance and no need of disconnection to the water supply network
- Anti-return valve
- Counter pressure closing system
- Silent floating valve (classified NF I)
- Joint for water supply network connection 3/8"G
- Dynamic pressure: 0,2-16 bar
- Static pressure: 20 bar
- Float valve certified in according to NF/WRAS standards

Fixing accessories :

- 1 seal
- 1 plastic top connection
- 1 protectionfilter against impurity

## **Instalation suggestions**

- Follow carefully the installation suggestions in the instruction sheet.

## **Maintenance**

- During the maintenance, float valve mechanisms and seals should be cleaned only with water. OLI will not accept claims arising from inadequate treatment with acids, chemicals or abrasives of the product.

## **Warranty**

- Five years warranty (5), according to the general selling terms, starts from the purchasing date of the products. If the product is not correctly installed, the warranty is not valid.

## **Information**

Please refer to our web site [www.olisrl.it](http://www.olisrl.it) for further information.